# China HuaMing E&E Co., Ltd WWW.EMCFittings.Com

# HM-2X100A 规格书(交流电源滤波器)

#### ◆ 技术参数 Specification

额定电压 Rated voltage 220VAC 工作频率 Operating frequency DC-60Hz额定电流 Rated current 100A 气候类别 Climatic category 25/085/21


#### 试验电压 Test voltage (2s/1Min)

线一线 Line-to-line: 1000VDC 线一壳 Line-to-case: 1000VDC

### 典型插入损耗 Typical insertion loss

频率	150K-18GHz
插入损耗(dB)	≥100dB
共模	

### 外形尺寸 Dimension

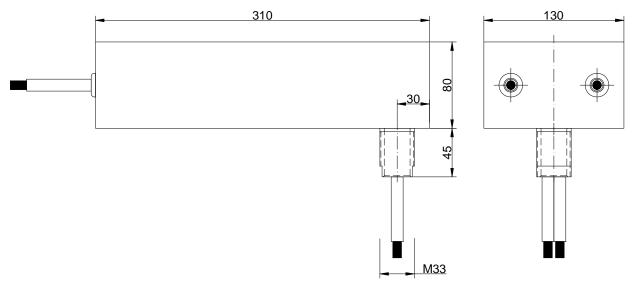

# 特点与应用 Features & Applications

工作频带宽,插入损耗高: Wide operating band, high insert loss

干扰抑制能力强: Strong ability for restrain interference

低压降,低漏电流: Low voltage drop, low leakage current

用于电磁屏蔽房、屏蔽柜、电子方舱、信息安全保密房、医院 CT、核磁共振房、可控硅变流设备、电源净化 设备的电源端的滤波 Use for filter in electro-magnetic shielding room、shielding cabinet、 electronic, square cabin, information security room, CT equipment of hospital, nuclear-magnetic, resonance room, SCR current converting equipment, power terminal of the equipments for power purification.