# China HuaMing E&E Co., Ltd WWW.EMCFittings.Com

## HM-2X16A 规格书(交流电源滤波器)

### ◆ 技术参数 Specification


### 典型插入损耗 Typical insertion

#### loss

额定电压 Rated voltage	220VAC
工作频率 Operating frequency	50/60Hz
额定电流 Rated current	16A
气候类别 Climatic category	25/085/21
漏电流 Leakage current ≤2.5A@22	20V/60Hz
试验电压 Test voltage (2s/1Min)	
线一线 Line-to-line:	1000VDC
线一壳 Line-to-case:	1000VDC

频率	150K-18GHz
插入损耗(dB)	≥100dB
共模、差模	

## 外形尺寸 Dimension

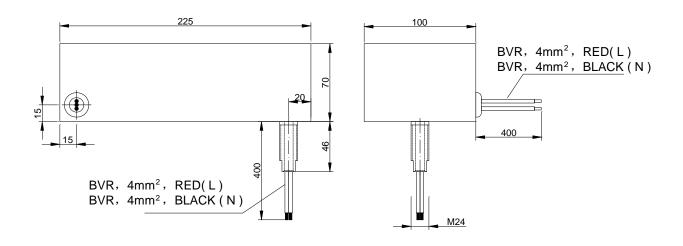

## 特点与应用 Features & Applications

工作频带宽,插入损耗高: Wide operating band, high insert loss 干扰抑制能力强: Strong ability for restrain interference 低压降,中等漏电流: Low voltage drop, low leakage current

用于电磁屏蔽房、屏蔽柜、电子方舱、信息安全保密房、医院 CT、核磁共振房、可控硅变流设备、电源净化 设备的电源端的滤波 Use for filter in electro-magnetic shielding room、shielding cabinet、 electronic, square cabin, information security room, CT equipment of hospital, nuclear-magnetic, resonance room, SCR current converting equipment, power terminal of the equipments for power purification.