

HM-4X300A5 (400Hz)-G1 规格书 (交流电源滤波器)

◆ 技术参数 Specification

典型插入损耗 Typical insertion loss


额定电压 Rated voltage	200/115VAC
工作频率 Operating frequency	DC-400Hz
额定电流 Rated current	300A
气候类别 Climatic category	25/070/21
试验电压 Test voltage (2s/1Min)	

频率	150K-10GHz
插入损耗 (dB) 共模、差模	≥100dB

线-线 Line-to-line: 1000VDC

线-壳 Line-to-case: 1000VDC

◆ 外形尺寸 Dimension

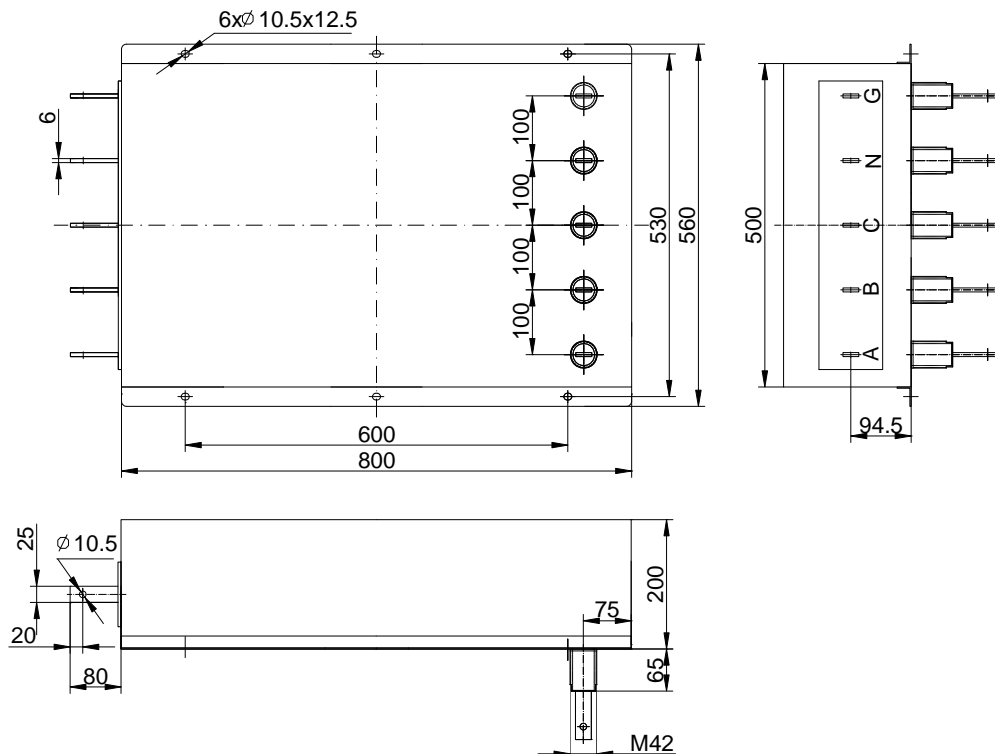

◆ 特点与应用 Features & Applications

工作频带宽，插入损耗高: Wide operating band, high insert loss

干扰抑制能力强: Strong ability for restrain interference

低压降，中等漏电流: Low voltage drop , low leakage current

用于电磁屏蔽房、屏蔽柜、电子方舱、信息安全保密房、医院 CT、核磁共振房、可控硅变流设备、电源净化设备的电源端的滤波 Use for filter in electro-magnetic shielding room、shielding cabinet、electronic、square cabin、information security room 、CT equipment of hospital、nuclear-magnetic、resonance room、SCR current converting equipment、power terminal of the equipments for power purification.

