

HM-4X6A 规格书(交流电源滤波器)

◆ 技术参数 Specification

额定电压 Rated voltage 250/440VAC

工作频率 Operating frequency 50/60Hz

额定电流 Rated current 6A


气候类别 Climatic category 10/070/21

试验电压 Test voltage (2s/1Min)

线-线 Line-to-line: 1000VDC

线-壳 Line-to-case: 1000VDC

◆ 外形尺寸 Dimension

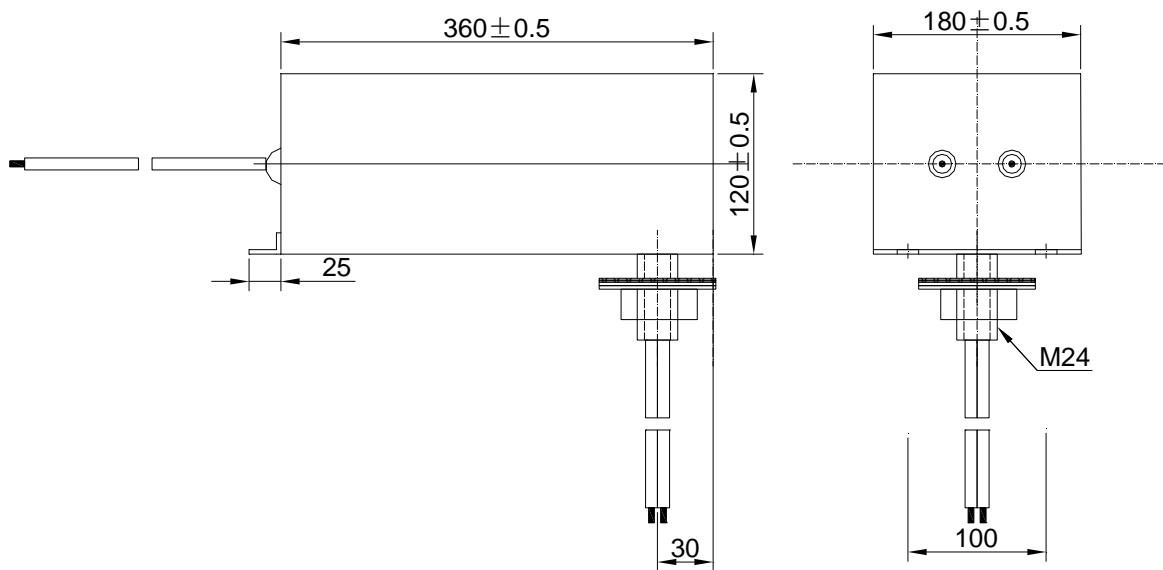

典型插入损耗 Typical insertion loss

频 率	100KHz-10GHz
插入损耗	≥ 100 dB

◆ 电性能 Electrical characteristics

特点与应用 Features & Applications

工作频带宽，插入损耗高: Wide operating band, high insert loss

干扰抑制能力强: Strong ability for restrain interference

低压降，低漏电流: Low voltage drop ,low leakage current

用于电磁屏蔽房、屏蔽柜、电子方舱、信息安全保密房、医院 CT、核磁共振房、可控硅变流设备、电源净化设备的电源端的滤波 Use for filter in electro-magnetic mask room、mask cabinet、electronic、square cabin、information security room 、CT equipment of hospital、nuclear-magnetic、resonance room、SCR current converting equipment、power terminal of the equipments for power purification.