

HM-PF-4×250A-AbleKorea 规格书 (电源滤波器)

◆ 技术参数 Specification


额定电压 Rated voltage	440/250VAC
额定电流 Rated current	250A
工作频率 Operating Frequency	50/60Hz
气候类别 Climatic category	25/070/21

典型插入损耗 Typical insertion loss

频率	150K-18GHz
插入损耗 (dB)	≥100dB
共模、差模	

◆ 外形尺寸 Dimension

Outline Drawing and Dimensions: (mm)

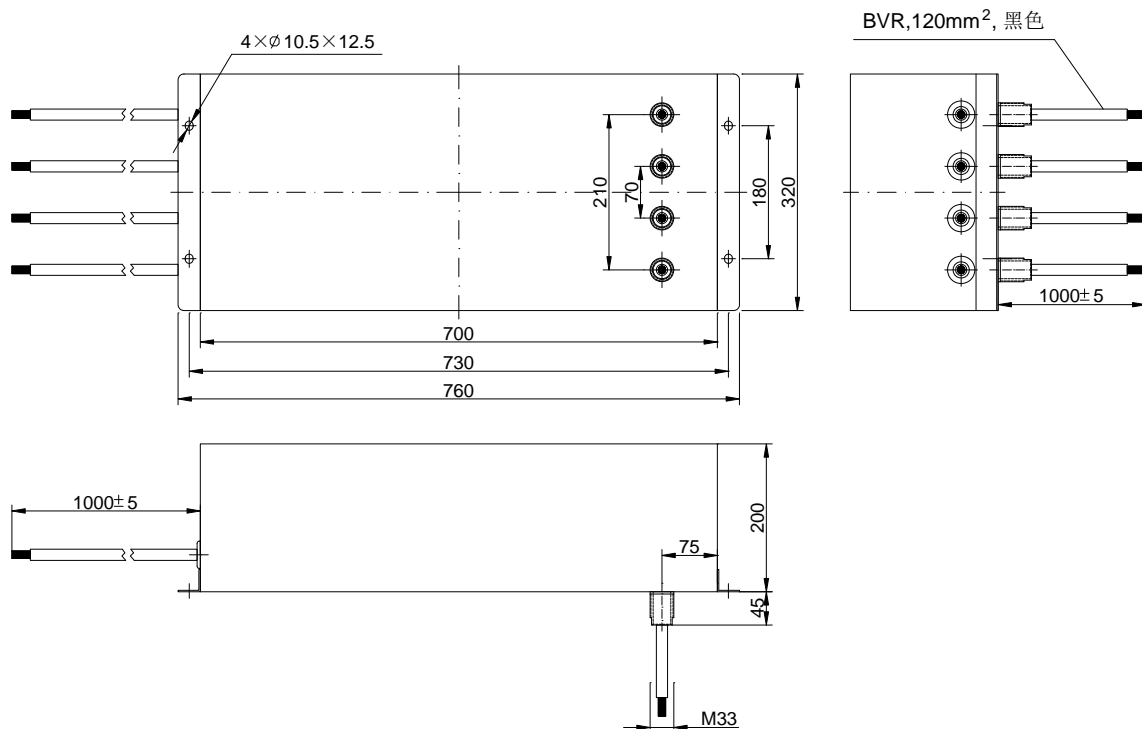

◆ 特点与应用 Features & Applications

工作频带宽，插入损耗高: Wide operating band, high insert loss

干扰抑制能力强: Strong ability for restrain interference

低压降，中等漏电流: Low voltage drop, low leakage current

用于电磁屏蔽房、屏蔽柜、电子方舱、信息安全保密房、医院 CT、核磁共振房、可控硅变流设备、电源净化设备的电源端的滤波 Use for filter in electro-magnetic shielding room, shielding cabinet, electronic, square cabin, information security room, CT equipment of hospital, nuclear-magnetic, resonance room, SCR current converting equipment, power terminal of the equipment for power purification.