China HuaMing E&E Co., Ltd WWW.EMCFittings.Com

HM-4X50A5-G1 规格书(交流电源滤波器)

◆ 技术参数 Specification


典型插入损耗 Typical insertion loss

额定电压	Rated voltage	380VAC
工作频率	Operating frequency	DC-60Hz
额定电流	Rated current	50A
气候类别	Climatic category	25/070/21
试验电压	Test voltage (2s/1Min)	

线一线 Line-to-line: 1000VDC 线一壳 Line-to-case: 1000VDC

频率	150K-10GHz	
插入损耗(dB)	≥100dB	
共模、差模		

◆ 外形尺寸 Dimension

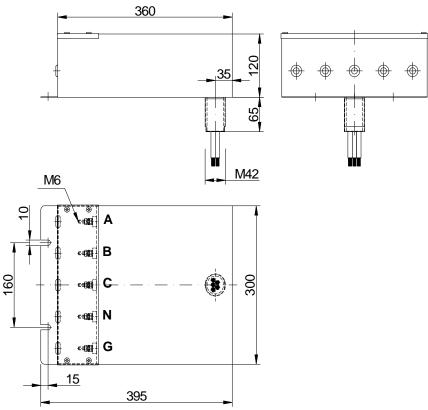

◆ 特点与应用 Features & Applications

工作频带宽,插入损耗高: Wide operating band, high insert loss 干扰抑制能力强: Strong ability for restrain interference 低压降,中等漏电流: Low voltage drop, low leakage current

用于电磁屏蔽房、屏蔽柜、电子方舱、信息安全保密房、医院 CT、核磁共振房、可控硅变流设备、电源净化设备的电源端的滤波 Use for filter in electro-magnetic shielding room、shielding cabinet、electronic、square cabin、information security room、CT equipment of hospital、nuclear-magnetic、resonance room、SCR current converting equipment、power terminal of the equipments for power purification.

