# China HuaMing E&E Co., Ltd WWW.EMCFittings.Com

# HM-SF-2X5A 规格书(交直流信号滤波器)

#### ◆ 技术参数 Specification


### 典型插入损耗 Typical insertion loss

额定电压	Rated voltage	220VAC
工作频率	Operating frequency	60Hz
额定电流	Rated current	5A
气候类别	Climatic category	25/085/21
试验电压	Test voltage (2s/1Min)	

线一线 Line-to-line: 1000VDC 线一壳 Line-to-case: 1000VDC

频率	150K-10GHz	
插入损耗(dB)	≥100dB	
共模、差模		

#### 外形尺寸 Dimension

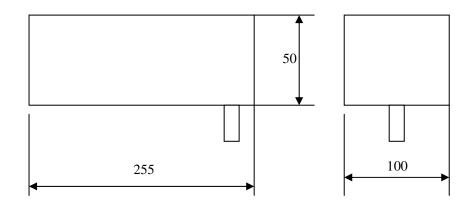

## 特点与应用 Features & Applications

工作频带宽,插入损耗高: Wide operating band, high insert loss

干扰抑制能力强: Strong ability for restrain interference

低压降,中等漏电流: Low voltage drop, low leakage current

用于电磁屏蔽房、屏蔽柜、电子方舱、信息安全保密房、医院 CT、核磁共振房、可控硅变流设备、电源净化 设备的电源端的滤波 Use for filter in electro-magnetic shielding room、shielding cabinet、 electronic, square cabin, information security room, CT equipment of hospital, nuclear-magnetic, resonance room, SCR current converting equipment, power terminal of the equipments for power purification.