

HM-PF-2X3A-C 规格书 (交流电源滤波器)


◆ 技术参数 Specification

| | |
|--------------------------|-----------|
| 额定电压 Rated voltage | 250VAC |
| 工作频率 Operating frequency | 50/60Hz |
| 额定电流 Rated current | 3A |
| 气候类别 Climatic category | 25/070/21 |

典型插入损耗 Typical insertion loss

| | |
|--------------------|-----------|
| 频率 | 10K-40GHz |
| 插入损耗 (dB) 共模、差模 | ≥100dB |

◆ 外形尺寸 Dimension

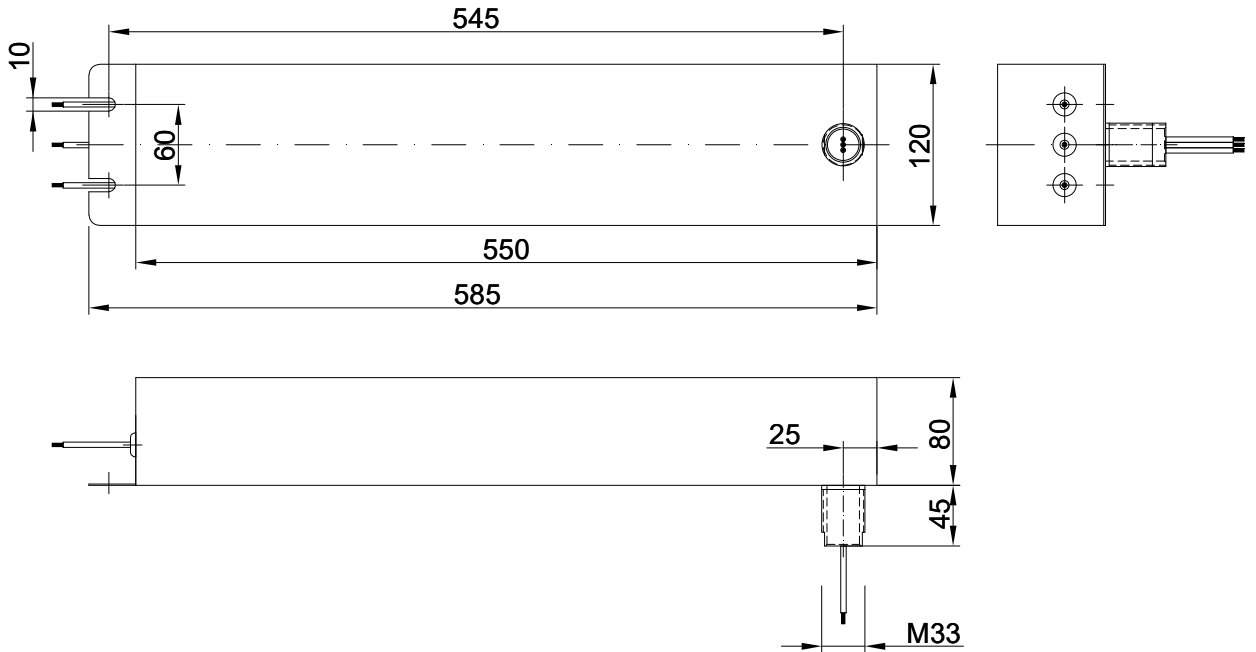

◆ 特点与应用 Features & Applications

工作频带宽，插入损耗高: Wide operating band, high insert loss

干扰抑制能力强: Strong ability for restrain interference

低压降，中等漏电流: Low voltage drop, low leakage current

用于电磁屏蔽房、屏蔽柜、电子方舱、信息安全保密房、医院 CT、核磁共振房、可控硅变流设备、电源净化设备的电源端的滤波 Use for filter in electro-magnetic shielding room、shielding cabinet、electronic、square cabin、information security room、CT equipment of hospital、nuclear-magnetic、resonance room、SCR current converting equipment、power terminal of the equipment for power purification.