

HM-2×60A Filter 规格书

China HuaMing E&E Co., Ltd

WWW.EMCFittings.Com

◆ 技术参数 Specification

额定电压 Rated voltage 250/440VAC

工作频率 Operating frequency 50/60Hz

额定电流 Rated current 60A

气候类别 Climatic category 10/070/21


试验电压 Test voltage (2s/1Min)

线-壳 Line-to-case: 1000VDC

典型插入损耗图 Typical insertion loss

频率	14K-18GHz
插入损耗	≥100dB

◆ 外形尺寸 Dimension

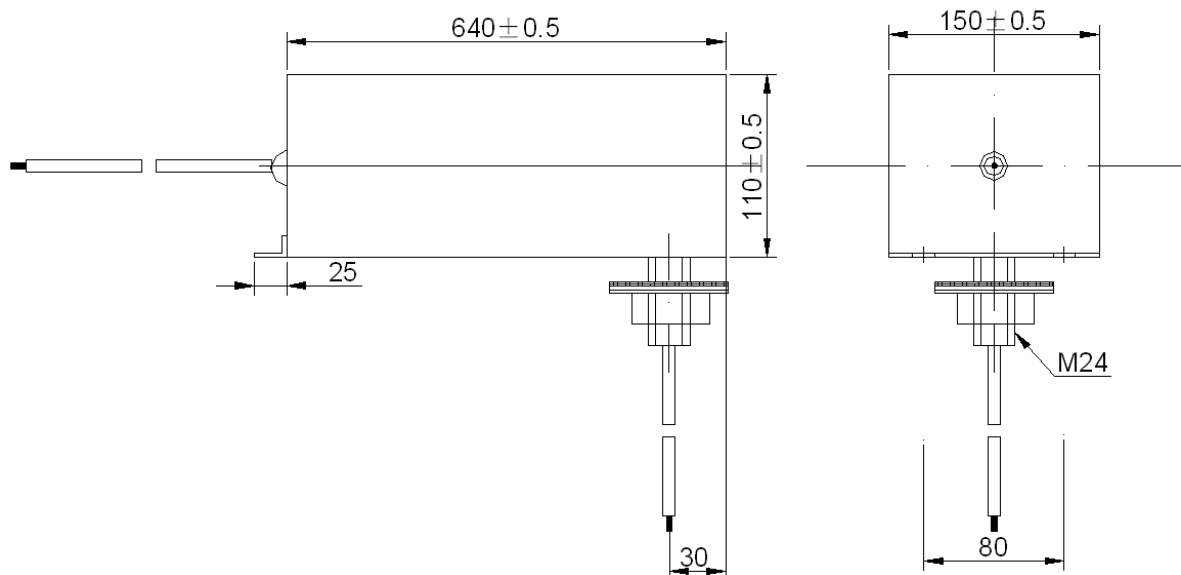

引线为 10mm^2 BVR 塑线。

◆ 特点与应用 Features&Applications

工作频带宽，插入损耗高：Wide operating band, high insert loss

干扰抑制能力强：Strong ability for restraining interference

用于电磁屏蔽房、屏蔽柜、电子方舱、信息安全保密房、医院 CT、核磁共振房、可控硅变流设备、电源净化设备的电源端的滤波 Use for filter in electro-magnetic shielding room、shielding cabinet、electronic、square cabin、information security room、CT equipment of hospital、nuclear-magnetic、resonance room、SCR current converting equipment、power terminal of the equipments for power purificationg.