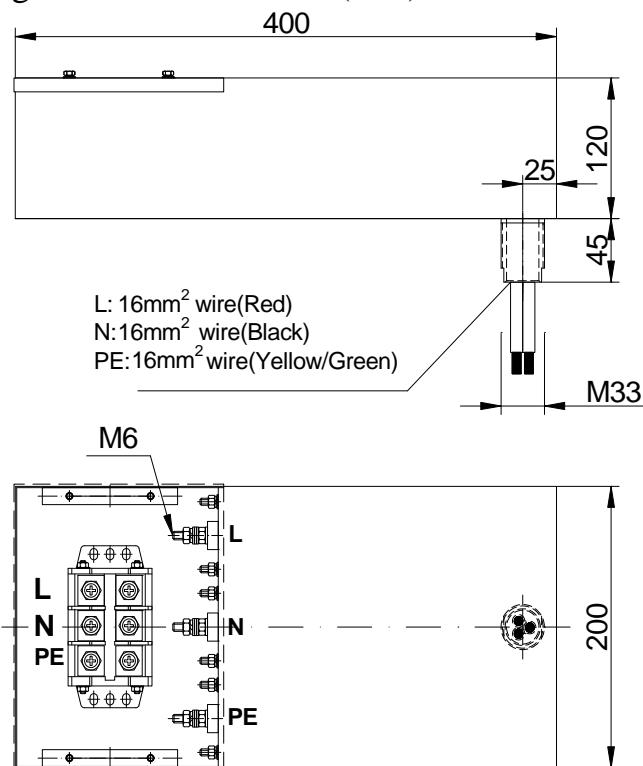


HM-2X60A-Cover 规格书(交流电源滤波器)**◆ 技术参数 Specification**

<u>额定电压</u> Rated voltage	250V
<u>工作频率</u> Operating frequency	DC-60Hz
<u>额定电流</u> Rated current	60A
<u>气候类别</u> Climatic category	25/070/21

漏电流 Leakage current $\leq 0.2A@250V/50Hz$ 试验电压 Test voltage (2s/1Min)线一壳 Line-to-case: 1000VDC**◆ 外形尺寸 Dimension**

Outline Drawing and Dimensions: (mm)

**◆ 特点与应用 Features & Applications**

工作频带宽，插入损耗高: Wide operating band, high insert loss

干扰抑制能力强: Strong ability for restrain interference

低压降，中等漏电流: Low voltage drop , low leakage current

用于电磁屏蔽房、屏蔽柜、电子方舱、信息安全保密房、医院 CT、核磁共振房、可控硅变流设备、电源净化设备的电源端的滤波 Use for filter in electro-magnetic shielding room、shielding cabinet、electronic、square cabin、information security room 、CT equipment of hospital、nuclear-magnetic、resonance room、SCR current converting equipment、power terminal of the equipment for power purification.

典型插入损耗 Typical insertion loss

频率	150K-18GHz
插入损耗 (dB) 共模、差模	≥ 100 dB