

HM-USB-ALU 规格书 (USB 信号滤波器)

◆ 技术参数 Specification


额定电压 Rated voltage	5V
额定电流 Rated current	200mA
气候类别 Climatic category	25/085/21

典型插入损耗 Typical insertion loss

频率 Frequency	50MHz-3GHz
插入损耗 (dB) Insertion loss (dB)	≥30dB

共模、差模 Common mode, differential mode

◆ 外形尺寸 Dimension

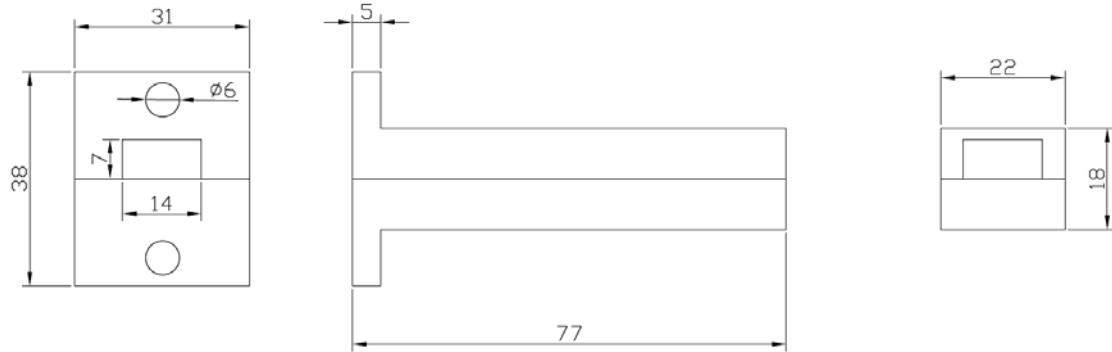

◆ 特点与应用 Features & Applications

工作频带宽, 插入损耗高: Wide operating band, high insertion loss

干扰抑制能力强: Strong ability for restrain interference

低压降, 中等漏电流: Low voltage drop, low leakage current

用于电磁屏蔽房、屏蔽柜、电子方舱、信息安全保密房、医院 CT、核磁共振房、可控硅变流设备、电源净化设备的电源端的滤波器 Use for filter in electro-magnetic shielding room, shielding cabinet, electronic, square cabin, information security room, CT equipment of hospital, nuclear-magnetic, resonance room, SCR current converting equipment, power terminal of the equipments for power purification.