

HM-USB-ALU 规格书 (USB 信号滤波器)

◆ 技术参数 Specification


| | |
|------------------------|-----------|
| 额定电压 Rated voltage | 5V |
| 额定电流 Rated current | 200mA |
| 气候类别 Climatic category | 25/085/21 |

典型插入损耗 Typical insertion loss

| | |
|-------------------------------|------------|
| 频率 Frequency | 50MHz-3GHz |
| 插入损耗 (dB) Insertion loss (dB) | ≥30dB |

共模、差模 Common mode, differential mode

◆ 外形尺寸 Dimension

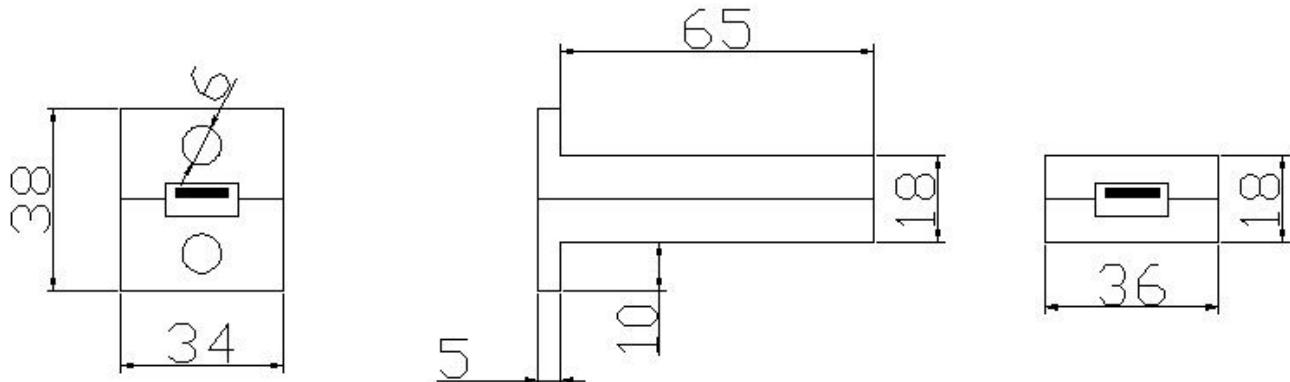

◆ 特点与应用 Features & Applications

工作频带宽，插入损耗高: Wide operating band, high insertion loss

干扰抑制能力强: Strong ability for restrain interference

低压降，中等漏电流: Low voltage drop, low leakage current

用于电磁屏蔽房、屏蔽柜、电子方舱、信息安全保密房、医院 CT、核磁共振房、可控硅变流设备、电源净化设备的电源端的滤波 Use for filter in electro-magnetic shielding room、shielding cabinet、electronic、square cabin、information security room 、CT equipment of hospital、nuclear-magnetic、resonance room、SCR current converting equipment、power terminal of the equipments for power purification.