China HuaMing E&E Co., Ltd WWW.EMCFittings.Com

HM-4X80A-115V 规格书(三相四线交流电源滤波器)

技术参数 Specification

额定电压 Rated voltage 115VAC 工作频率 Operating frequency 400Hz 额定电流 Rated current 80A 气候类别 Climatic category 25/085/21

漏电流 Leakage current 200mA@115V/400Hz

试验电压 Test voltage (2s/1Min)


线-线 Line-to-line: 1000VDC

线 - 壳 Line-to-case: 1000VDC

典型插入损耗 Typical insertion loss

频率	14K-18GHz
插入损耗(dB)	100dB
共模	

外形尺寸 Dimension

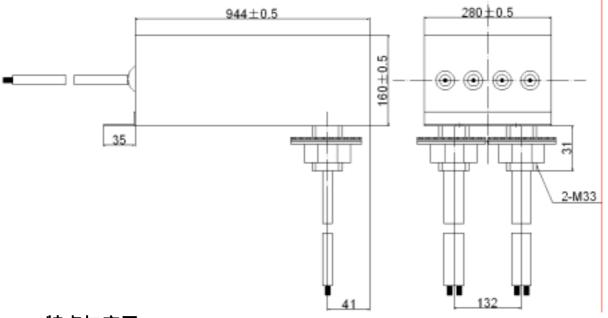

特点与应用 Features&Applications

工作频带宽,插入损耗高:Wide operating band, high insert loss

干扰抑制能力强:Strong ability for restraing interference

低压降,低漏电流:Low voltage drop, low leakage current

用于电磁屏蔽房、屏蔽柜、电子方舱、信息安全保密房、医院CT、核磁共振房、可控硅变流设备、电源净化 设备的电源端的滤波 Use for filter in electro-magnetic shielding room、shielding cabinet、 electronic, square cabin, information security room, CT equipment of hospital, nuclear-magnetic, resonance room, SCR current converting equipment, power terminal of the equipments for power purificationg.